

# How do you handle printing from the WebClient?


There are four options for printing in WebClient:

- from the WebClient to the browser in a separate tab
- from the WebClient to the client's download folder
- from the WebClient to a server printer
- from the Application Server to a server printer

## Printing to the client's browser window:

The WebClient's default printing method follows a user's familiar experience when accessing a document from the web browser.

If you print to "-P SPOOLER" the document will open in a new page of the browser as a pdf document, and the user will be given the option to print.

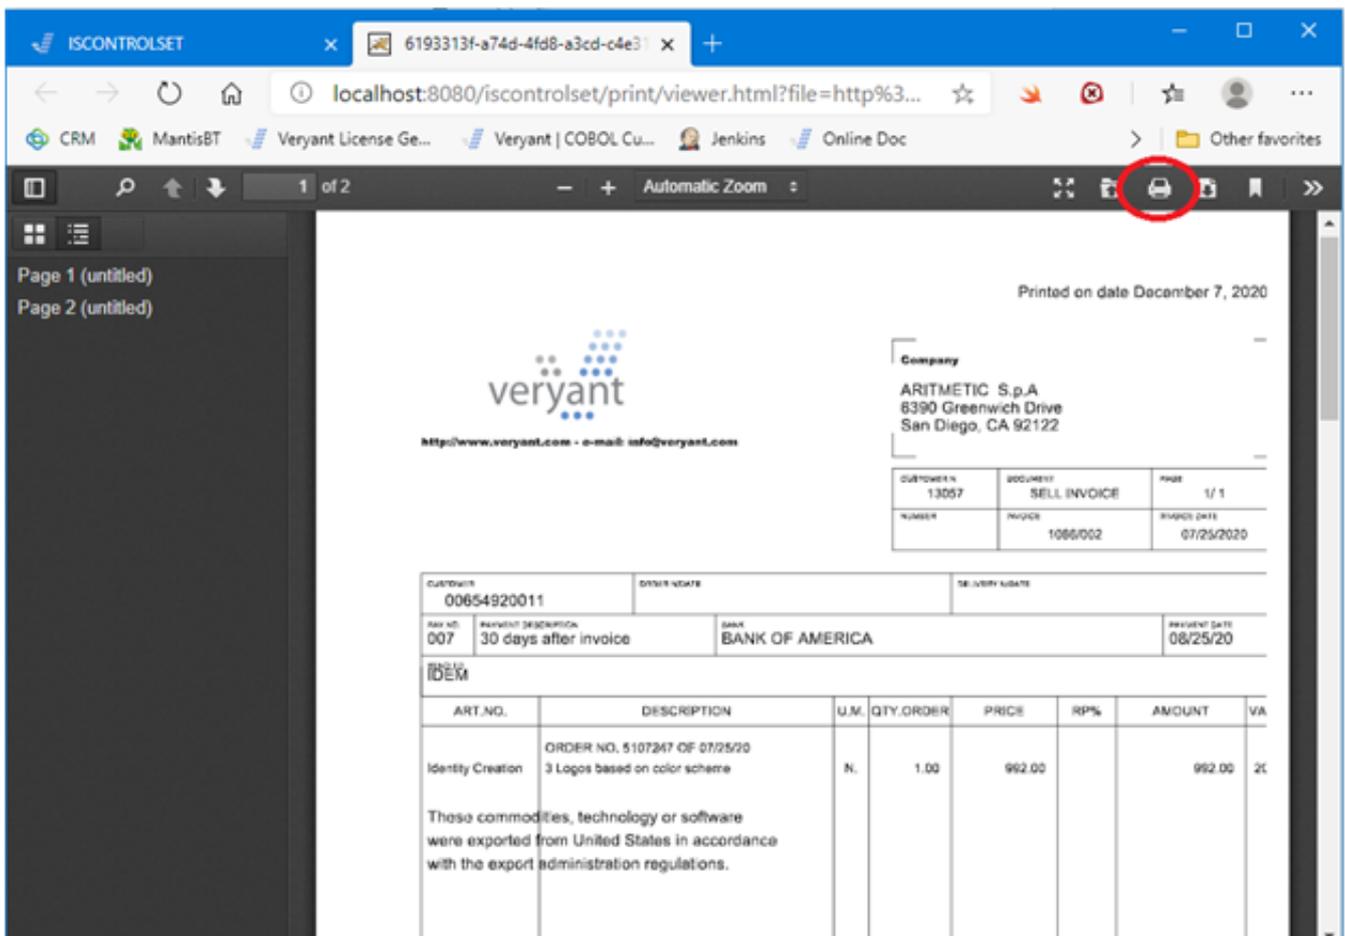

The screenshot shows a web browser window displaying a document viewer. The browser's address bar shows the URL: localhost:8080/iscontrolset/print/viewer.html?file=http%63... The document content includes the Veryant logo, company information for ARITMETIC S.p.A., and a table with invoice details. A printer icon in the browser's toolbar is circled in red.

CUSTOMER N.	DOCUMENT	PAGE
13057	SELL INVOICE	1/ 1
NUMBER	PRICE	INVOICE DATE
	1066002	07/25/2020

CUSTOMER N.	ORDER NUMBER	DELIVERY DATE	
00654920011			
ART. NO.	DESCRIPTION	BANK	PAYMENT DATE
007	30 days after invoice	BANK OF AMERICA	08/25/20


ART. NO.	DESCRIPTION	U.M.	QTY. ORDER	PRICE	RP%	AMOUNT	VA
Identity Creation	ORDER NO. 5107247 OF 07/25/20 3 Logos based on color scheme	N.	1.00	992.00		992.00	20

These commodities, technology or software were exported from United States in accordance with the export administration regulations.

## Downloading to the client's download folder:

If you print to "-P PDF" the document will be put onto the WebClient server, and you can use

C\$EASYOPEN or C\$DESKTOP to move the document to the client machine, where it will download within the browser to the download folder set up in the browser settings.

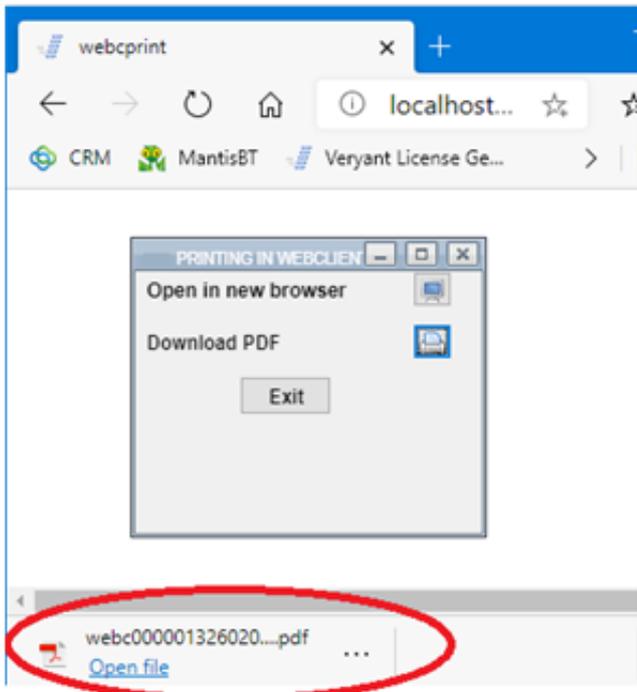

We often get asked how to print a page directly to the client's printer. This isn't possible from the WebClient, because executing client processes and accessing client resources from a browser is a security risk and blocked by all browsers. The Application Server communicates with the browser, not directly with the user.


However, it's common practice for a web user to click on a request to print a document from a web page, and see that document either displayed on a separate tab as a PDF document or downloaded. The user is used to clicking on the print button at this point.

Attached is a sample program that shows the difference between option #1 (opening a document in a new browser window) and #2 (downloading it as a pdf to the users' desktop).

If you want to print to a printer installed on the server where the WebClient is running, you have two options. Note however that the client's local printers are not available unless those printers are also installed on the WebClient's server.

### **Printing from the WebClient server:**

In the WebClient console's configuration window, one of the last options available is "Allow Server Printing". If you turn this on, the program can print to any printer installed on the WebClient process's server.

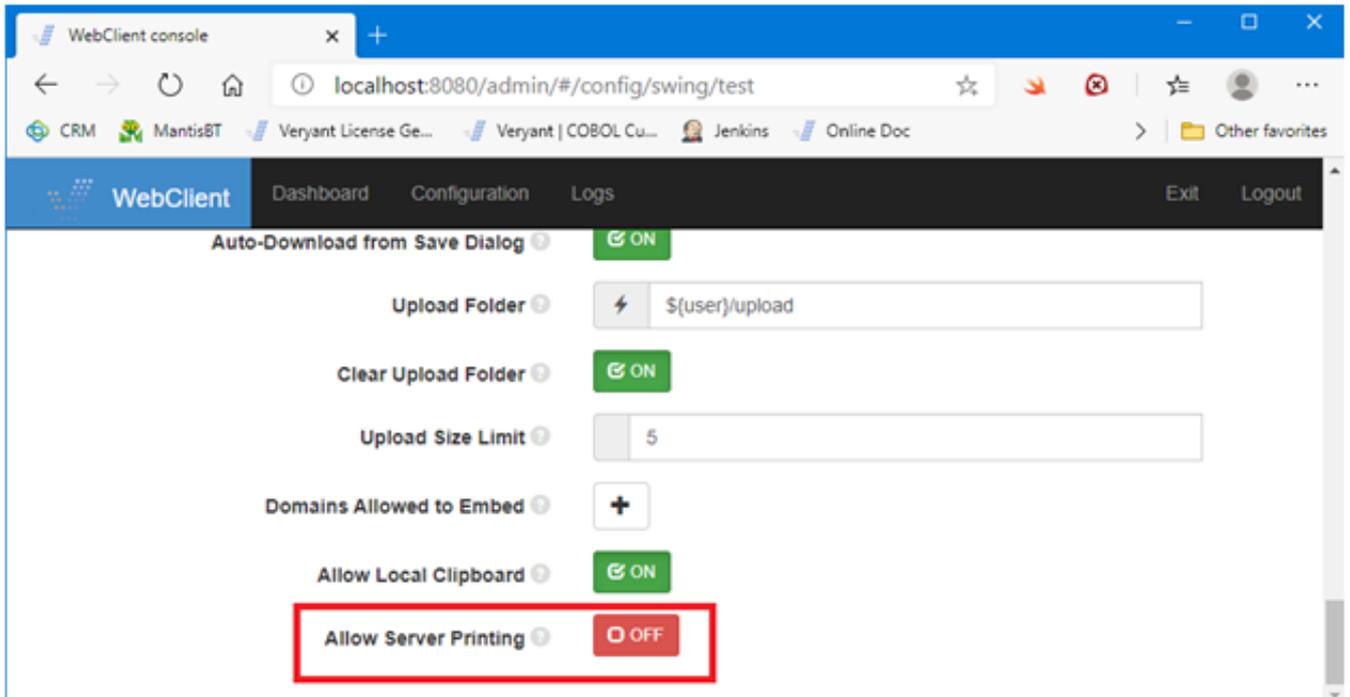

### Application Server to a server printer:

The last WebClient printing option is to bypass the WebClient completely, and handle the printing from the Application Server.

```
set wprt-as-server to true  call "WIN$PRINTER" using winprint-set-printer-  
as                          winprint-as
```

The printers on the Application Server's server are available with this option. You can see more code to handle this type of printing in our ISCONTROLSET sample:

```
%ISCOBOL%/sample/iscontrolset/PRINTGUI.cbl
```

Online URL: <https://support.veryant.com/phpkb/article.php?id=318>